

# CHICAGO APPROVED RED LED EXIT SIGN

Code: CHEX



City of Chicago approved exit sign with steel housing and glass face. Now standard with energy saving LED illumination instead of incandescent lamps.



**Compatible Battery:** BAA-48R

## ORDERING INFORMATION

Series	Housing Color	Sides	Operation Type	Voltage	Signage	Arrows
CHEX	White	Single	AC (AC Only)	120V/277V	EXIT	None
		Double	BB (Battery Backup)		STAIRS	Left, Right, Both

## FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- City of Chicago approved
- Now uses LEDs for improved energy efficiency
- Open-face glass panel, silk-screen letters
- 20 gauge steel housing with white powder coat finish
- Universal mounting canopy included for side, top and flush mounting (add 2" for canopy)
- Integrated solid state system, lock out, low voltage battery cutoff, dual voltage 120/277
- NON CEC Compliant

## WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

## Conformance to Codes and Standards

The CHEX series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

## CONSTRUCTION

The CHEX series is constructed from durable 20-gauge steel. Unique design allows double face conversion on field.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


## BATTERY - BATTERY BACKUP

The CHEX series is designed with a maintenance-free 4.8V 700mAh battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## INSTALLATION

The CHEX is suitable for ceiling and end mount via steel mounting canopy.

## DIMENSIONS

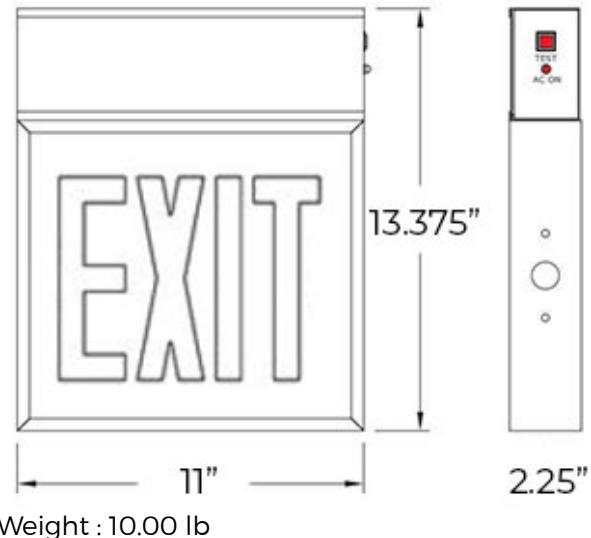

Weight : 10.00 lb

3170 Scott St Vista CA 92083

P: 877-534-4621 | E: [info@lfi-inc.com](mailto:info@lfi-inc.com) | W: [www.lfi-inc.com](http://www.lfi-inc.com)