

## CUSTOM SIGNAGE WITH THERMOPLASTIC HOUSING

Code: EX-CU



The EX-CU Custom Sign is a perfect blend of modern design and reliable functionality. Constructed with durable thermoplastic housing, it ensures long-lasting performance and dependability. Featuring full LED illumination, this sign provides bright, energy-efficient visibility, with the option to choose between red or green LED lighting. Available in white or black housing, it seamlessly complements various styles. Its innovative custom curved corner design adds a sleek, contemporary touch, setting it apart from traditional signage. The EX-CU is the ultimate solution for those seeking style and customization in one exceptional product.



**Compatible Battery:** [BAA-12](#)

### FEATURES

- Mounting bracket for ceiling, wall mount (flag pole style) or flush mount included
- Injection-molded, VO flame retardant, high impact housing
- Constant uniform illumination
- 120/277VAC
- Short circuit protection / voltage surge protection
- Green LEDs and black housing available upon request

### WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our [Warranty Section](#).

**\*This specification sheet applies to multiple custom sign configurations. While the technical data remains consistent across all versions, the custom text may vary.**

## CONSTRUCTION

The EX-CU series is constructed from injection molded, V-0 flame retardant, high impact thermoplastic housing with easy snap-out chevron directional indicators. Available in white and black housing.

## ILLUMINATION

The EX-CU series illumination is achieved by use of long-lasting, efficient ultra bright red or green LEDs.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277VAC operation. LED display indicates AC/ON. An external push button test switch with battery backup units allows maintenance personnel to quickly determine the operation status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## BATTERY - BATTERY BACKUP

The EX-CU series is designed with a maintenance-free 1.2V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## OPERATIONAL TEMPERATURE

### Temperature Ratings


Standard Option

32°F to 122°F

## INSTALLATION

The EX is suitable for surface wall, side and top mounting via included canopy. Snap together design allows for quick and easy installation.

## DIMENSIONS

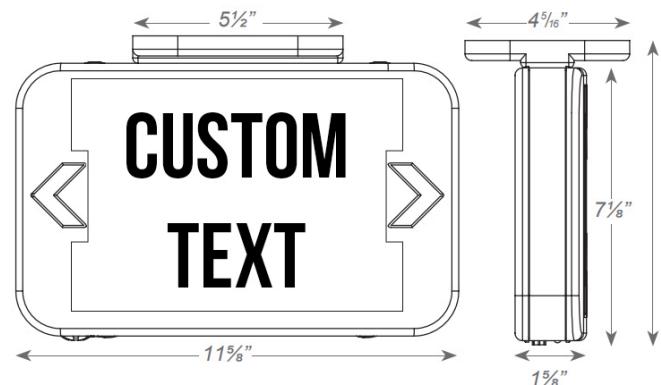

Weight : 5.00 lb

3170 Scott St Vista CA 92083

P: 877-534-4621 | E: [info@lfi-inc.com](mailto:info@lfi-inc.com) | W: [www.lfi-inc.com](http://www.lfi-inc.com)