

EXTERIOR COMBO EXIT SIGN | SQUARE LED LAMPS

Code: WLFCOMBO



Ultra bright, compact unit provides the affordability you've been looking for in a highend package. Standard Temperature ratings 32°F to 104°F (0°C to 40°C)



Compatible Battery: 3.6V 1200mAh Ni-Mh

FEATURES

- UL 924, NEC, OSHA, NFPA 101 Life Safety Code, and Listed for Wet Locations
- Square LED Lamps
- Maintenance free 3.6V 1200mAh Ni-Mh Battery (Included)
- Fixture can be single or double sided
- Ultra bright LEDs
- Push-to-test switch
- 120/277 VAC dual operation
- Removable directional indicators
- Injection Molded thermoplastic ABS housing, UL 94V-0 flame rating

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The WLFCOMBO series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA, NFPA 101 Life Safety Code requirements, and UL Listed for Wet Locations.

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
WLFCOMBO	R (Red)	W (White)	BB (Battery Backup)
	G (Green)		

CONSTRUCTION

The WLFCOMBO series is constructed of injection-molded thermoplastic ABS housing. UL 94V-0 Flamre Rated. Fully gasketed with engineering grade silicone.

ILLUMINATION

The WLFCOMBO series uses ultra bright, energy efficient red or green LEDs. Features 2 fully adjustable square LED lamp heads.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solidstate transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The WLFCOMBO Weatherproof Combo Exit Sign series is designed with a maintenance-free Ni-Mh battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE


Temperature Ratings

Series	Temperature
Battery Backup	0°C to 40°C / 32°F to 104°F

INSTALLATION

The WLFCOMBO combination unit is suitable for surface wall and end mounting. Suitable for indoor and wet location installations.

DIMENSIONS

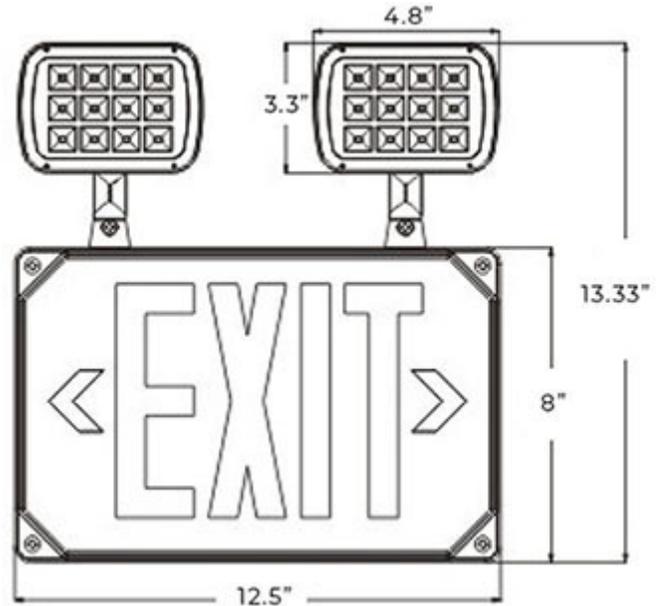

Weight : 10.00 lb

3170 Scott St, Vista, CA 92081
Phone: 877-352-3948 | Fax: 877-352-3949
info@exitlightco.com