

WET LISTED LED EMERGENCY LIGHT

CODE:EMEL-WETLED



The EMEL-F2 series light provides a stylish and practical solution to your outdoor emergency lighting needs.

Compatible Battery: NiCad 3.6V 900mAh

FEATURES

- UL 924, NEC, OSHA and NFPA 101 Life Safety Code
- Listed for Wet locations
- Two fully adjustable, glare-free LED lighting heads
- LED indicator light with push-to-test switch
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Universal 120/277 VAC operation
- Fully gasketed corrosion resistant enclosure
- Short circuit, voltage surge, brown out and low battery voltage disconnect protected

Warranty Information

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Code and Standards

The EMEL-WETLED series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA and NFPA 101 Life Safety Code requirements.

ORDERING INFORMATION

Series	Housing Color	Operation Type	Options

CONSTRUCTION

The EMEL-WETLED Emergency Light is constructed from injection molded, high impact V-O flame retardant thermoplastic housing.

ILLUMINATION

Emergency lamps use long-lasting, energy efficient ultra bright white LED's. 12 high output LED's per head.

ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.


BATTERY - BATTERY BACKUP

The ELCEL-WETLED Emergency Light is designed with a maintenance-free 3.6V 900mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours. Operational temperature range is 50°F (10°C) to 104°F (40°C).

INSTALLATION

The EMEL-WETLED series is suitable for surface wall and ceiling mount.

DIMENSIONS

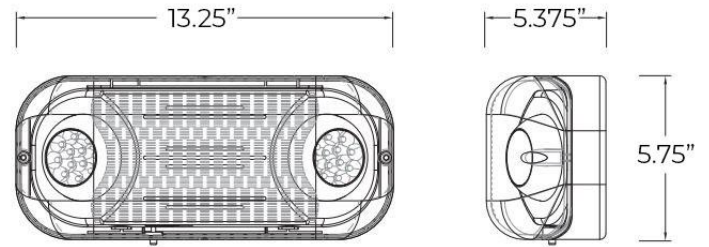

Weight : 4.00 lb