



The COMBOJR series provides a modern twist to standard exit/emergency lighting with dependable LED energy efficiency in a compact design



**FEATURES**

- UL 924, NEC, OSHA NFPA 70, and NFPA 101 Life Safety Code
- All LED light! No SLA batteries, uses long lasting NiCads that are very low maintenance
- Rated for Damp Locations
- Fully adjustable head lamps
- Universal mounting canopy for top installation or flush mount to wall
- Lightweight with snap-together construction for easy installation
- LED status indicator
- Injection molded, impact- and scratch-resistant, corrosion-proof, UL 94 V-0 flame retardant housing
- Push-to-test switch
- Universal transformer for 120 or 277 VAC operation

**WARRANTY INFORMATION**

Any component that fails due to manufacturer’s defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

**Conformance to Codes and Standards**

The COMBOJR series is UL listed and meets or exceeds the following: UL 924, NEC, OSHA NFPA 70, and NFPA 101 Life Safety Code requirements.

**ORDERING INFORMATION**

Series	Letter Color	Housing Color	Operation Type
COMBOJR	R (Red)	W (White)	BB (Battery Backup)
	G (Green)		

## CONSTRUCTION

The COMBOJR series is constructed from injection molded, impact- and scratch-resistant and corrosion-proof UL 94 V-0 flame retardant thermoplastic housing. White housing is standard.

## ILLUMINATION

Uses (2) 1W lamps that distribute even white light. EXIT portion uses long-lasting, efficient red LEDs.

## ELECTRICAL COMPONENTS

Dual voltage input 120/277 VAC operation. LED display indicates AC/ON. An external push button test switch allows maintenance personnel to quickly determine the operational status of the unit. Unit offers surge protected, solid state circuitry.

## EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## BATTERY - BATTERY BACKUP

The COMBOJR Combo Exit Light series is designed with a maintenance-free 3.6V 1000mAh NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

## OPERATIONAL TEMPERATURE


### Temperature Ratings

Standard Option	0°C to 40°C / 32°F to 104°F
-----------------	-----------------------------

## INSTALLATION

The COMBOJR is suitable for surface wall and top mounting via included canopy. Uni body housing snaps together with no additional fasteners. Quick connect installation design allows for quick and easy installation. Knock-out chevrons for customized egress signage and field adjustable.

## DIMENSIONS

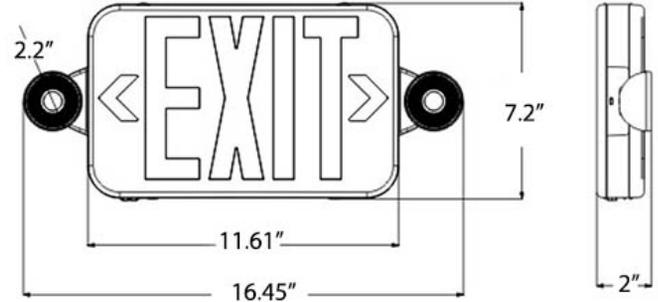

Weight : 10.00 lb

3170 Scott St, Vista, CA 92081  
Phone: 877-352-3948 | Fax: 877-352-3949  
info@exitlightco.com