

STEEL HOUSING RED/GREEN LED EXIT SIGN | WHITE HOUSING | BATTERY BACKUP OR AC ONLY OPERATION

Code: EXST



The EXST-R Steel Exit Sign works on either 120 or 277 VAC. Faceplate includes knock-out left/right arrows. Allows top, lateral or flush mount installation. Fixture is 1 or 2 sided.



Compatible Battery: BAA-48R

ORDERING INFORMATION

Series	Letter Color	Housing Color	Operation Type
EXST	R (Red)	W (White)	BB (Battery Backup)
	G (Green)		AC (AC Only, No battery)

FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code
- Certified to CEC Under Title 20 Regulations
- Listed for damp location
- Push-to-test switch (Battery Backup Only)
- 120/277V operation
- Rugged high impact steel with powder coat finish
- Charge rate / power on LED indicator light
- Long life, energy saving LED lamps
- Universal mounting canopy for top or side installation
- 4.8V 700mAh NiCad battery

WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

Conformance to Codes and Standards

The EXST Sign is UL listed and meets or exceeds the following: UL 924, NEC, NFPA 101 Life Safety Code requirements, and CEC under Title 20 Regulations.

CONSTRUCTION

Constructed from durable, powder-coated 20-gauge steel, the EXST Exit Sign is available in a white or black finish to suit various applications. Its unique design allows for easy double-face conversion in the field, while field-selectable steel knockout Chevron directional indicators provide flexible installation options.

ILLUMINATION

Illumination is achieved by use long-lasting, high intensity Red or Green LEDs. Color-matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL COMPONENTS

The EXST Exit Sign operates on dual 120/277V input and includes a charge rate/power "ON" LED indicator light with a push-to-test switch for code compliance testing. An internal solid-state transfer switch automatically connects the battery to the LED board to provide a minimum of 90 minutes of emergency illumination. A fully automatic, solid-state two-rate charger efficiently recharges a discharged battery within 24 hours.

EMERGENCY OPERATION

Upon failure of the normal utility power, an internal solid-state transfer switch automatically provides uninterrupted emergency operation for at least 90 minutes. The fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

BATTERY - BATTERY BACKUP

The EXST Steel Exit Sign is designed with a maintenance-free 4.8V NiCad battery that provides a minimum emergency duration of 90 minutes. Recharge time of the battery is 24 hours.

OPERATIONAL TEMPERATURE

Temperature Ratings


Standard Option

32°F to 122°F

INSTALLATION

The EXST Exit Sign includes a mounting canopy for top or end mounting and features a universal knockout pattern on the back plate for easy wall mounting, offering flexible installation options to suit various applications.

DIMENSIONS

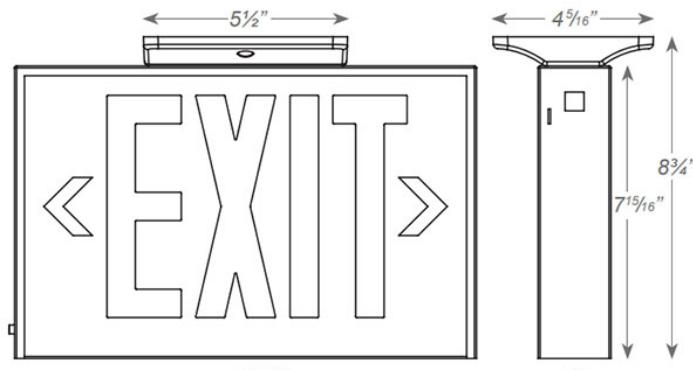

Weight : 6.00 lb

3170 Scott St Vista CA 92083

P: 877-534-4621 | E: info@lfi-inc.com | W: www.lfi-inc.com