



## PHOTOLUMINESCENT EXIT SIGN ALUMINUM HOUSING | RED, GREEN, OR BLACK FACE

Code: PA2



The PA2 is an easy to install electricity free Exit Sign that does not require wiring, or batteries.



Made in the U.S.A.

### FEATURES

- UL 924, NEC and NFPA 101 Life Safety Code
- Listed for damp location
- No electricity, no batteries required
- Operating Temperature 50°F – 104°F
- Field installable arrow configuration
- 50 foot viewing distance
- 90 minutes of illumination
- Requires 54 LUX (5-ft candles) of LED, fluorescent, metal halide or mercury vapor light to charge material for 60 minutes
- Explosion proof, weatherproof
- Produced on durable .040" aluminum substrate
- Indoor installation only
- Do not expose to direct sunlight
- No future hazmat disposal needed
- Optional frame available

### WARRANTY INFORMATION

Any component that fails due to manufacturer's defect is guaranteed for 1 year. The warranty only covers products installed and maintained in accordance with the instructions provided by their respective manufacturer and no warranty is made with respect to any of our products that are otherwise installed or maintained. For full warranty details, visit our Warranty Section.

### Conformance to Codes and Standards

The PA2 series is UL listed and meets or exceeds the following: UL 924, cUL, and NFPA 101 Life Safety Code requirements.

### ORDERING INFORMATION

Series	Sign Color	Frame
PA2	R (Red)	WM (Framed for Wall Mount)
	G (Green)	CM (Framed for Ceiling Mount)
	B (Black)	SM (Framed for Side Mount)

## CONSTRUCTION

The PA2 exit sign series is made from durable rigid aluminum base.

## ILLUMINATION

The PA2 Series has a viewing visibility of 50 feet. Provides consistent, uniform illumination.

## ELECTRICAL COMPONENTS

The PA2 Series does not use nor requires any type of electrical components.

## EMERGENCY OPERATION

Upon failure of the normal utility power the PA2 exit sign will provide at least 90 minutes of illumination.

\*The sign must be charged for a minimum of 60 minutes to become fully operational.

## INSTALLATION


The PA2 exit sign series is suitable for wall mount, ceiling mount, and side mount. Pre-made holes are found on each corner for easy wall mount installation.

Double sided tape can be used for wall installation.

2 self-adhesive chevrons are supplied with each sign that allows for fast and easy field configuration.

\*Ceiling and Side mount requires a frame and a mounting kit (Not included, sold as an option)

## DIMENSIONS

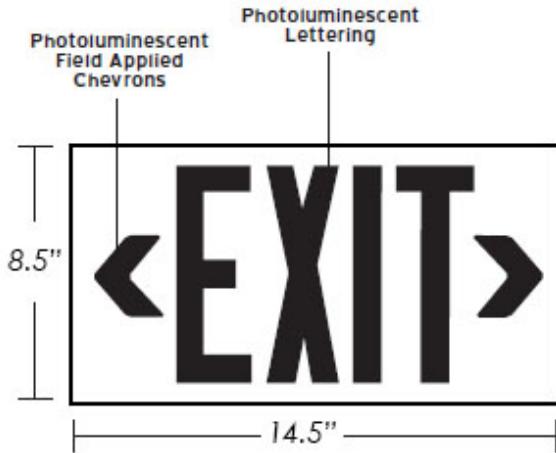

Weight : 4.00 lb

---

3170 Scott St Vista CA 92083  
P: 877-534-4621 | E: [info@lfi-inc.com](mailto:info@lfi-inc.com) | W: [www.lfi-inc.com](http://www.lfi-inc.com)